


CAD Drawing

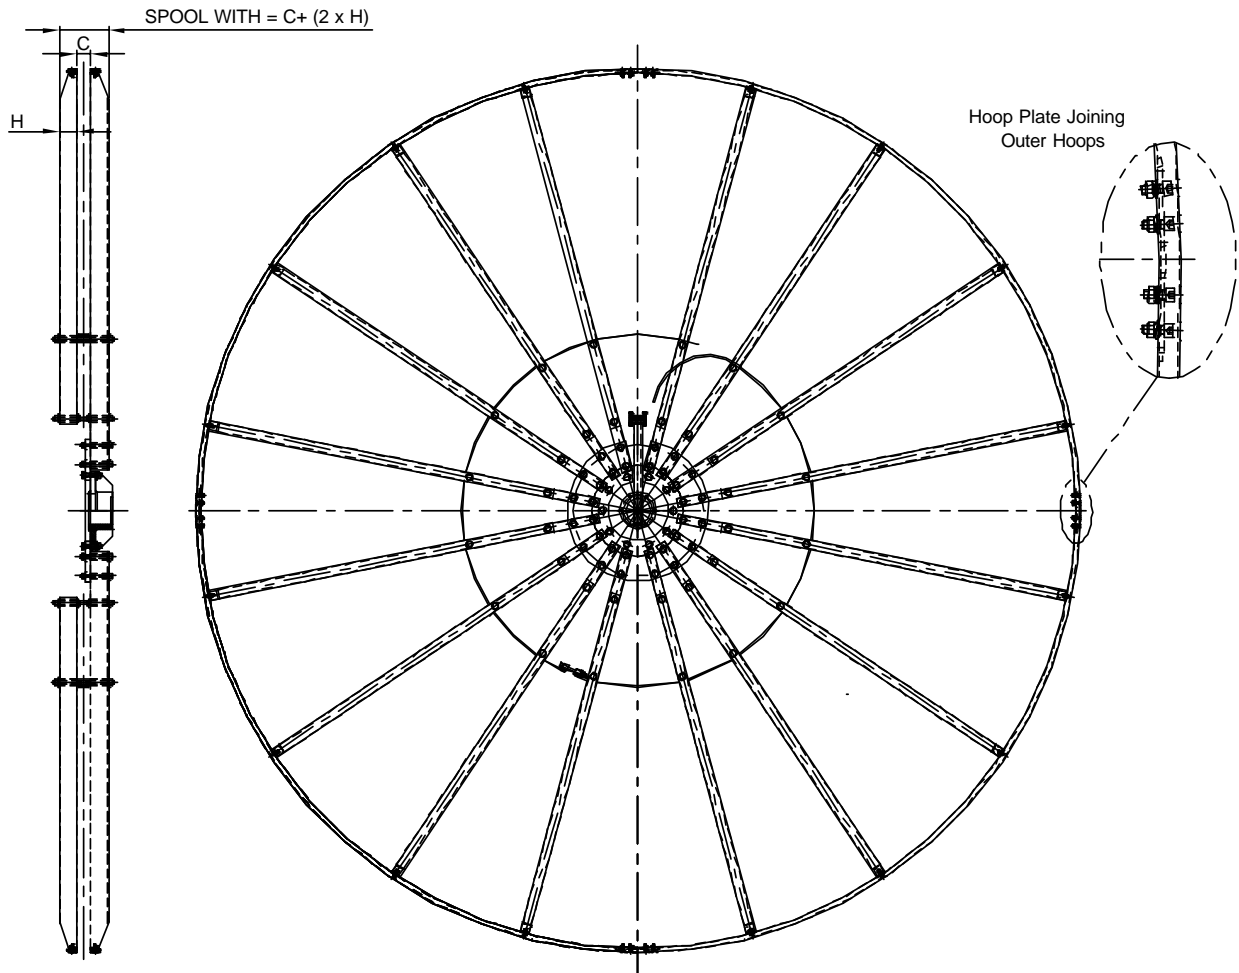

MONOSPIRAL SPOOL FORMED FLAT SALES ORDER CODE

QTY	SPOOL	A	B	Q	H	C	W	NOTE	
	Series	Gearbox (Hub Plate)	Inside Diameter (mm)	Outside Diameter (mm)	Spoke Quantity	Spoke Width (mm)	Gap (mm)	Weight (kg)	*To calculate gap refer to sizing calculation sheet 629-970-40606PT)
	SMMHF	GB-50	2000	6000	32	127	*	1080	

DETAIL(S):

SPOOL DESIGNED FOR MAXIMUM CRANE TRAVEL PLUS DEADWRAPS. EXCESS CABLE WILL EFFECT REEL OPERATION.

SPOOLS SHIPPED COMPLETELY ASSEMBLED IN TWO HALVES, MAXIMUM OUTSIDE DIAMETER OF 4500MM.

SPOOLS SHIPPED ABOVE 4500MM TO BE ASSEMBLED ON SITE (ASSEMBLY INSTRUCTIONS PROVIDED BY HILLMAR).

ALL SPOOL ASSEMBLIES USE STAINLESS STEEL FASTENERS. PLATED FASTENERS FOR MOUNTING.

APPLICABLE TO ALL NON STRUCTURAL FASTENERS

**** ALL TECHNICAL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE ****

Hillmar works have a fully registered ISO 9001:2000 quality assurance programme (QCB #01-1626).